


# SMART FILM / GLASS

## ELECTRICITY GUIDE

### Part 1: Testing and connecting to Power

**Step 1.1:** Each FILM / GLASS has A busbar and a short wire on it. If you need additional wire, you may purchase regular wires from a local hardware store and solder to the existing wire.

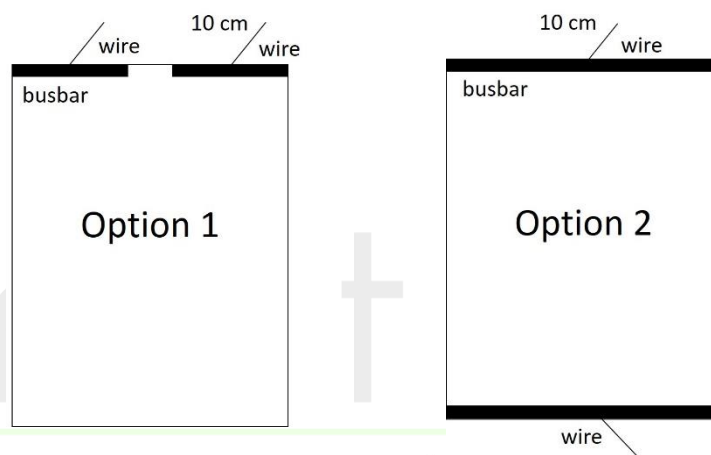

**Step 1.2:** Connecting to power. Our basic transformer comes with a RF remote control. We have it in three coverage levels: 5, 10 and 20 sqm; both 230-65V AC and 115-65V AC types.

**Note:**


There are no batteries included with the remote control and no cables inside the transformer power supply.

**Note:**

You may also install a wall switch or a remote switch wall. You then need to use a different transformer type that exclude RF remote.



**Step 1.3:** Gathering several films to one transformer.

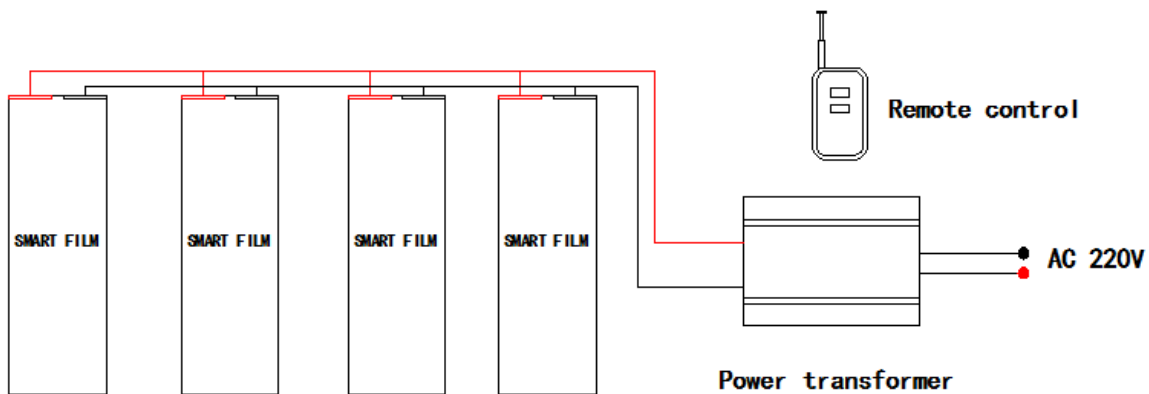

**Note:**

If you would like to add an external remote control, then you need to locate it between the Transformer and the FILM /GLASS.

**Part 2: Sync the remote control to the transformer**

Step 1 – Turn OFF red button on the transformer power supply

Step 2 – Click remote control button and hold ON for 4 seconds

Step 3 – Turn ON red button on the transformer power supply

Step 4 – After 2 second, the transformer will make a sound. Now it is ready for use.